

# CrystalView DVI Fiber



## Digital Fiber KVM extender

Extends keyboard, video, and mouse signals up to:

- 650ft (200m) w/ 62,5 $\mu$ m Multimode-Fiber
- 1300ft (400m) w/ 50.0 $\mu$ m Multimode-Fiber
- 33,000ft (10,000m) w/9.0 $\mu$ m Singlemode-Fiber
- 1,250ft (2,000m) w/3.2 GBit model)

Supports DVI-D video at resolutions up to 1920 x 1200

3.2 GBit optional models

User selectable DDC table

Serial and Audio option

Supports Singlemode and Multimode fiber cables

PS/2 or USB keyboard and mouse support

Single or Dual video models

Easily adapted to your system

## Features and Benefits

- Supports:
  - DVI-D video modes
  - PS/2 or USB keyboards and mice
  - Bi-Directional serial (Optional)
  - Full CD Quality stereo audio (Optional)
- Extend a KVM station from a CPU using fiber cable up to 6 miles (1¼ mile for 3.2 GBit model)
- Video resolutions up to 1920 x 1200 @ 60Hz
- Supports 18-Bit color (256,000 colors)
- Single and Dual video models available
- Compatible with all operating systems
- Fully automatic KVM sharing on local access models
- Status and Data error indicators on all units
- Easy installation and operation

## The CrystalView™ DVI Fiber Advantage

The CrystalView DVI Fiber is the KVM extender of choice for businesses that need to extend and operate a computer, server, or KVM switch from a great distance. The CrystalView DVI Fiber makes this possible by the use of singlemode or multimode fiber cable. You can fully operate and control a computer or server from as far away as 6 miles using 9 $\mu$ m singlemode fiber (1.25 miles using the 3.2 GBit model). The CrystalView DVI Fiber supports all combinations of DVI-D monitors and video cards.


The system consists of two units; a transmitter and a receiver. The transmitter connects to your CPU's keyboard, DVI-D monitor, and mouse connectors, or to a Rose KVM switch. The receiver connects to a keyboard, DVI-D video monitor and mouse or KVM station. The transmitter and receiver are connected together with fiber cable. The receiver can be up to 6 miles from the transmitter using 9 $\mu$ m Singlemode-Fiber (1.25 miles using the 3.2 GBit model).

All models are available with both transmitter and receiver KVM access. The transmitter's KVM access allows an additional KVM station to be connected to the transmitter unit. If your system requires dual video, the CrystalView DVI Fiber dual video model can fully support it.



Fiber makes extended distances easy to reach

## Typical Application

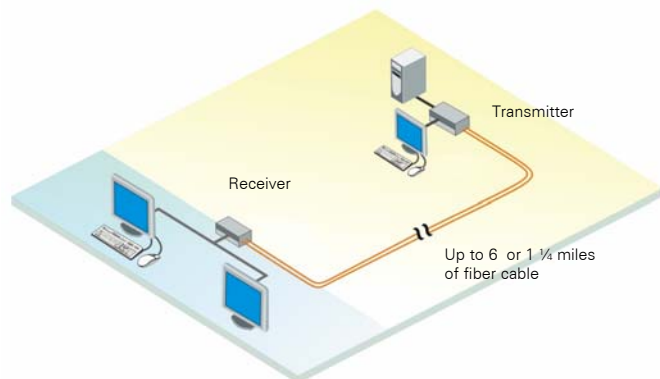

Dual DVI Video model Application  
Digitally access a computer from two locations,  
locally and remotely

**CrystalView DVI Fiber basics** The CrystalView DVI Fiber system consists of a transmitter that connects to a PC, server, or KVM switch and a receiver that connects to a keyboard, monitor, and mouse or a KVM switch. The transmitter and receiver units are connected together with up to 1¼ or 6 miles of standard fiber cable depending on model.

**Models** The CrystalView DVI Fiber is available in a PS/2 or USB model. All models allow for a second KVM station next to the PCs, providing operation from the transmitter or the receiver unit. There is also a dual video model for systems that need to digitally transmit a second video source.

**Installation** Installing the CrystalView DVI Fiber units is as easy as connecting the KVM station to the receiver, connecting the CPU to the transmitter, and connecting the transmitter to the receiver with fiber cable.

**Keyboard and Mouse emulation** The CrystalView DVI Fiber uses a microprocessor to emulate the keyboard and mouse. Only the transmitter unit has to be connected for the PC to boot properly.

### Part Numbers – Multi-Mode Fiber Extender kits\*

|              |                 |
|--------------|-----------------|
| CRK-2DFMPD1D | PS/2 model      |
| CRK-2DFMUD1D | USB model       |
| CRK-2DFMPD2D | PS/2 Dual Video |
| CRK-2DFMUD2D | USB Dual Video  |

### Part Numbers – Single-Mode Fiber Extender kits\*

|              |                 |
|--------------|-----------------|
| CRK-2DFSUD1D | PS/2 model      |
| CRK-2DFSUD1D | USB model       |
| CRK-2DFSUD2D | PS/2 Dual Video |
| CRK-2DFSUD2D | USB Dual Video  |

\*kits include transmitter and receiver units

/AUD part number suffix = serial and audio option

/3.2 part number suffix = 3.2 GBit model option

## Specifications

|                    |   |
|--------------------|---|
| Dimensions         | 4.125W x 5.625D x 1.375H (in)<br>10.0W x 14.4D x 3.0H (mm)<br>H = 2.7in (6.3mm) for dual video  |
| Weight             | 0.65 lbs / 0.3 kg (each)<br>1.20 lbs / 0.6 kg (each-dual video)   |
| Operating Temp     | 5°C – 45°C / 41°F – 113°F   |
| Storage Temp       | -25°C – 60°C / -13°F – 140°F Humidity<br>80% max, non-condensing  |
| Resolution         | up to 1920 x 1200 @60 Hz  |
| Connectors         | Video – DVI – I<br>Keyboard – MiniDIN6 / USB Type A<br>Mouse – MiniDIN6 / USB Type A<br>Fiber – LC fiber  |
| Power              | 90-240 VAC to 5.0 VDC / app. 10W  |
| Power Requirements | Local unit: 750 ma max<br>Remote Unit: 750 ma max   |
| Max distance       | 650ft (200m) 62.5µm Multimode<br>1300ft (400m) 50.0µm Multimode<br>33,000ft (10km) 9.0µm Singlemode<br>1,250ft (2,000m) w/3.2 GBit model)                                     |
| Indicators (LEDs)  | Front panel – power<br>Video check LED<br>RJ45 LEDs – Data error / status   |
| Approvals          | CE  |
| Serial Data:       | Baud Rate up to 19,200<br>Data Flow - Format independent<br>Flow control - RTS, CTS, DTR, DSR   |
| Audio Data:        | Signal level 5V p-p<br>Impedance 47KΩ<br>Connectors 3.5mm stereo jack<br>Transmission 16 bit, 38.4KHz Digitized audio<br>Microphone Powered or un-powered<br>Speakers Powered |



CrystalView DVI Fiber  
(Single video model)



CrystalView DVI Fiber  
(Dual video model)

USB keyboard and mouse models available

■ Phone: 281-933-7673 ■ E-mail: sales@rose.com ■

10707 Stancliff Rd. Houston, TX 77099

Rose Electronics – Europe: +49 (0)2454 969442 Rose Electronics – Asia: +65 6324 2322

DS-CRVDF-1.8

© Copyright 2006 -2007 Rose Electronics. All rights reserved

 **ROSE**  
ELECTRONICS

WWW.ROSE.COM