


UPort™ 1100 Series (cable-type)

1-port RS-232, RS-422/485, and RS-232/422/485 USB-to-serial converters

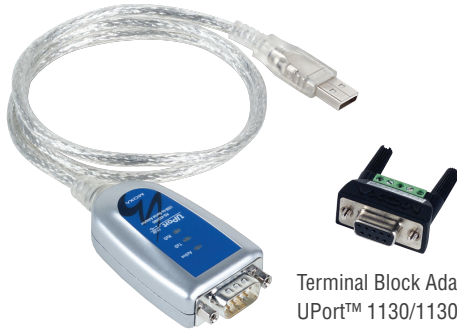

Terminal Block Adaptor for UPort™ 1130/1130I/1150

- > Compatible with USB 2.0
- > 12 Mbps USB data rate
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > Drivers provided for Windows, WinCE, and Linux
- > Mini DB9 female to terminal block adaptor for easy wiring
- > LEDs for indicating USB and TxD/RxD activity
- > 15 KV ESD protection for all serial ports
- > 2 KV optical isolation protection (UPort™ 1130I only)



Instant Plug & Play

The UPort™ 1110/1130/1130I/1150 USB-to-serial converters are the perfect accessory for laptop computers that don't have a serial port. The UPort™ 1110 converts from USB to RS-232, the UPort™

1130/1130I from USB to RS-422/485, and the UPort™ 1150 from USB to RS-232/422/485. All three products are compatible with new and legacy serial devices, and can be used with mobile, instrumentation, and point-of-sale applications.

Specifications

USB Interface

Compliance: USB 1.0/1.1 compliant, USB 2.0 compatible

Connector: USB type A

Speed: 12 Mbps (Full-Speed USB)

Serial Interface

Number of Ports: 1

Serial Standards:

UPort™ 1110: RS-232

UPort™ 1130/1130I: RS-422/485

UPort™ 1150: RS-232/422/485

Connector: DB9 male

Serial Line Protection

ESD Protection: 15 KV embedded

Optical Isolation: 2 KV (UPort™ 1130I only)

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

I/O Address: Assigned by BIOS

IRQ: Assigned by BIOS

FIFO: 64 bytes

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

RS-485-4w: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

RS-485-2w: Data+(B), Data-(A), GND

Driver Support

Operating Systems: Windows (98/ME/2000, XP/2003/Vista x86/x64), WinCE 5.0/6.0, Linux 2.4, Linux 2.6 x86/x64

Physical Characteristics

Housing: ABS + PC

Weight:

Product only: 65 g (0.14 lb)

Packaged: 200 g (0.44 lb)

Dimensions: 38.4 x 60 x 20 mm (1.51 x 2.36 x 0.79 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 70°C (-4 to 158°F)

Regulatory Approvals: EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC-61000-4-6, IEC 61000-4-8, IEC-61000-4-11, FCC Part 15 Class B

Power Requirements

Power Consumption:

UPort™ 1110: 30 mA @ 5 VDC

UPort™ 1130: 60 mA @ 5 VDC

UPort™ 1130I: 65 mA @ 5 VDC


UPort™ 1150: 77 mA @ 5 VDC

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

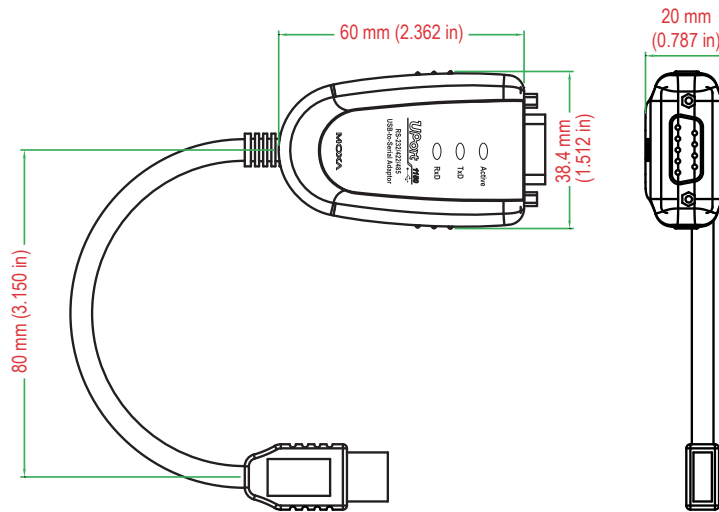

Ordering Information

Available Models

- UPort™ 1110:** 1-port RS-232 USB-to-serial converter
- UPort™ 1130:** 1-port RS-422/485 USB-to-serial converter
- UPort™ 1130I:** 1-port RS-422/485 USB-to-serial converter with 2 KV optical isolation
- UPort™ 1150:** 1-port RS-232/422/485 USB-to-serial converter

Package Checklist

- UPort™ 1110 or 1130 or 1130I or 1150 USB-to-serial converter
- 1 mini DB9 female to terminal block adaptor (UPort™ 1130, 1130I, and 1150 only)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card