



I/O for the IIoT

Edge I/O creates a simpler way to meet the needs of today's industrial internet of things (IIoT) applications

OPTO 22
The Future of Automation.

Opto 22

43044 Business Park Drive • Temecula • CA 92590-3614

Phone: 800-321-6786 or 951-695-3000

Pre-sales Engineering is free.

Product Support is free.

www.opto22.com

Form 2338-200416

© 2020 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

I/O FOR THE IIOT

Edge I/O creates a simpler way to meet the needs of today's industrial internet of things (IIoT) applications

CHALLENGES

In an era of increasing connectivity and technical capabilities, it seems like simple ideas should be, well, simple to achieve. Suppose you need to do something like:

- Log temperature data from a refrigeration unit into a database
- Receive a text message if a warehouse door is opened after hours
- Publish process flow and pressure data into a SCADA system
- Send an air compressor's total running time to a cloud analytics system
- Control a security light with your smartphone

Simple ideas, right? But, in fact, while we can do all of this with current technology, it's expensive, demands special skills, and involves many steps—all of which make any IIoT project far from simple.

IIOT PROJECTS ARE TOO COMPLEX

The majority of signals in the real world are basic wired switches, sensors, and transmitters, despite advances in smart wireless devices. Getting signal data where you want it to go is complicated.

Log temperature data

Take temperature data, for example.

First, you—or someone you hire—needs to have the skills required to specify and procure all the numerous components of an I/O or PLC system that will work with a temperature sensor.

Then you must install an appropriate enclosure for the PLC and I/O, assemble them, and supply them with power.


Next, you install a temperature sensor in the refrigeration unit, and connect it to a suitable input channel on a temperature input module mounted on the PLC rack.

Then you program that PLC, using the vendor's proprietary software, to configure the input channel for the correct signal type and to acquire and log the I/O data.

Next, you'll likely need a PC with a software application that can read the PLC's memory for the logged data, and translate the data into a format the database can understand.

Finally, some software will need to log into the database and post, or insert, the logged, translated data. And if the database isn't on premises, or in the cloud somewhere that's accessible, good luck!

Logging temperature data to a database is too complex:

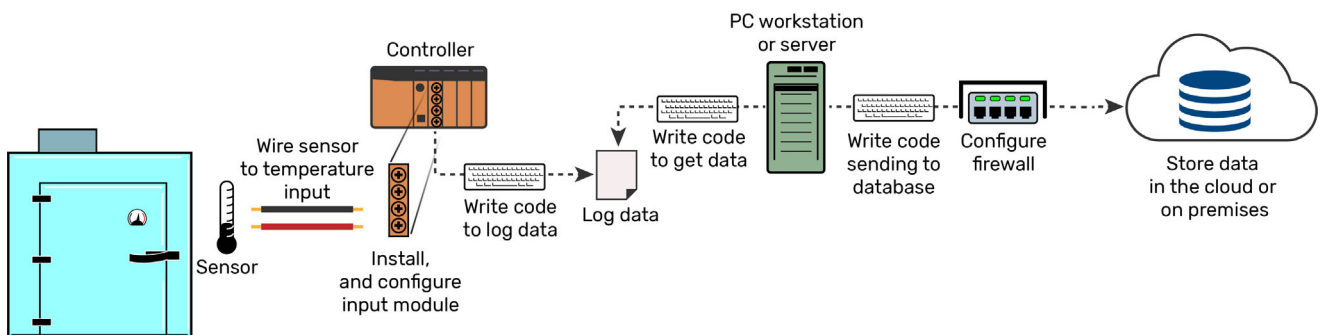

I/O for the IIoT

Often you already have sensors, contacts, and transmitters in place with the data you need, but that data is locked in proprietary PLC systems behind someone's control program.

Send compressor on-time

What about sending the compressor on-time to a cloud analytics platform?

Again, first you must specify, buy, and install the right equipment.

Then you wire a status contact on the compressor to a digital input module on the PLC, PAC, or controller to sense its on/off status.

After that, you program the PLC to configure the input and write ladder diagram or a function block to totalize how long the input is on, which will keep track of how long the compressor has been running.

Next, you'll need a gateway or other suitable computer that can read the PLC's memory for the totalized data and provide that data to the cloud analytics package of your choice in a format it can understand.

Not simple.

Control security light

Turning on a security light from your phone sounds easy, but it still involves many steps. Once you have the light contact wired to an output on a PLC or PAC and the output configured, you'll program the PLC to turn the light on or off based on an input from an HMI, which is usually running on a separate PC.

But if your HMI software program isn't mobile-ready, you'll need to find a different HMI package, buy it, and build new interface screens.

A complicated, costly process

As we can see in just these few examples, meeting seemingly simple needs today is a complicated process. In many cases, you already have sensors, contacts, and transmitters in place with the data you need, but that data is locked in proprietary PLC systems behind someone's control program. To access that data, typically you have to:

- Change the program in the PLC, PAC, or other controller to acquire the data you need

- Purchase and activate necessary middleware (hardware and software, including licenses) with the protocols, languages, and translators required for your application
- Configure and program middleware as necessary to move data where it's needed
- Understand and configure internet gateways and network connections, including server firewalls, security certificates, and user accounts
- Establish communications between the PLC, PAC, or controller and the data's destination

MOVING TOWARD SIMPLICITY

The goal we're trying to reach with the IIoT is a simpler process of gathering real-world signal data, communicating it, and making it available where it needs to be used.

Whether you're monitoring remote assets, acquiring data for analysis or regulatory purposes, controlling equipment and processes, or bringing visualization to operators and supervisors, you want to avoid complexity and the time and money costs that go with it.

Fortunately, automation manufacturers are introducing newer kinds of I/O—called *edge I/O*—with features designed to help streamline IIoT projects.

Key simplifiers

These new edge I/O products do not require a PLC or industrial PC. Instead, they are designed as intelligent, distributed I/O devices to meet the needs of IIoT applications, especially those that require data acquisition or communications.

What are some of the key features of new edge I/O products that help simplify IIoT projects?

- **Easy to spec and buy.** A single part number includes everything you need: I/O, networking, processor, power, and embedded software. Edge I/O units don't necessarily require a power supply, instead using power over Ethernet (PoE) for the unit's processor as well as excitation for outputs and self-wetting discrete inputs. Typically, the cost is within many maintenance budgets.
- **Compact and sturdy.** Edge I/O products are small industrial units that can be placed almost anywhere. They operate within a wide range of ambient temperatures and comply with environmental

requirements, including UL Hazardous Locations and ATEX approvals. Edge I/O is available in small form factors and may be DIN-rail or panel mounted.

- **Web-based configuration.** For maximum flexibility in diverse applications, edge I/O may include various kinds of multifunction or multi-signal (DI/DO/AI/AO) channels, all configurable via web-based software. It may also include intelligent features like counting, thermocouple linearization, minimum/maximum values, and digital totalizing, which run independently on the unit.
- **Embedded software and protocol support.** A secure, authenticated, web-based interface simplifies commissioning and troubleshooting with edge I/O. Additional software is embedded as well, typically for creating simple data flows to connect edge I/O with local or cloud-based software and services. IT protocols and OT protocols are both supported, and efficient data communication methods like MQTT add flexibility, performance, and security.
- **Built-in security.** To help you maintain cybersecurity, edge I/O includes a number of features to protect the unit and your data, for example, user authentication, data encryption, VPN support, security certificates, and a device firewall you can configure from the web-based interface.

By reducing the cost and complexity of IIoT projects, edge I/O makes your simple ideas much easier to achieve.



groov RIO edge I/O unit from Opto 22

Part number GRV-R7-MM1001-10 includes eight software-configurable multifunction, multi-signal channels (inputs or outputs, discrete DC or analog, switch, voltage, current, ICTD, or thermocouple) and two Form C relays.

EDGE I/O IN ACTION

One example of new edge I/O products is the *groov* RIO® family from automation manufacturer Opto 22. The first product released in the family is a compact remote unit with a communications processor and 10 built-in I/O channels: eight software-configurable multifunction, multi-signal I/O channels and two Form C relays.

Let's see how an edge I/O product like *groov* RIO could help with some of the simple applications we mentioned on [page 3](#).

First, specifying I/O for a particular application becomes much simpler. Because *groov* RIO supports thousands of unique I/O configurations from a single device, you no longer need to identify and procure specific I/O modules. You can order just one part number.

Second, mounting the unit and connecting it to a standard Ethernet network are easier.

You place *groov* RIO near the sensors or equipment with the signals you want. RIO's operating temperature is -20 °C to +70 °C, it is UL Hazardous Locations approved and ATEX compliant, and it can be panel or DIN-rail mounted. An enclosure may not be required, especially in low-voltage applications.

groov RIO attaches to an Ethernet network through one of its two switched Gigabit interfaces. You can use power over Ethernet (PoE) with a PoE switch, or provide 10-32 VDC power. The device automatically receives an IP address from your corporate LAN's DHCP server, just like most other smart devices on an Ethernet network. Note that wireless LAN networking is also supported through optional USB WiFi dongles (not included).

Once the unit is in place, you open a web browser and create a secure user account, configure I/O channels, and set up data communications for your application. The following sections list the steps to complete three of our simple applications from [page 3](#).

Log refrigeration unit temperature to a database

1. Wire one of the first eight channels to a low-cost, simple two-wire ICTD (integrated circuit temperature device) temperature sensor and place the sensor in the refrigeration unit.
2. From a computer or mobile device, securely log into *groov* RIO and use the browser-based *groov* Manage

I/O for the IIoT

software to configure the channel as an ICTD input sensor.

3. Still in your web browser, open the embedded Node-RED editor. Use pre-built nodes to create a simple flow that moves the temperature data to an on-premises or cloud-based database, like MariaDB, Microsoft SQL Server, or PostgreSQL.

Done!

Compare the image with *groov* RIO, below, to the image on [page 3](#). Using edge I/O removes several hardware and programming steps, simplifying the process.

NOTE: You could also write a flow to log the temperature to local on-board, power-fail-safe flash memory, or to an installed USB memory stick connected directly to *groov* RIO's USB port—especially handy if the remote location has no internet connection.

Send compressor on-time to a cloud analytics system

1. Wire one of the first two I/O channels to the compressor's run/stop contact. In a web browser, configure the channel as a discrete input with the on-time totalizing feature. *groov* RIO automatically totals the amount of time the compressor is running.
2. Open Node-RED and create a simple flow to move totalized data to the analytics system.

Done!

Publish data to a SCADA system

1. Wire process instrumentation transmitters (like level, flow, or pressure) to the first four I/O channels and configure as analog inputs (voltage or current).
2. In *groov* Manage, configure MQTT communications to publish channel data to an MQTT broker. SCADA systems can then subscribe to data from the broker.

Done!

***groov* RIO offers a single, compact, PoE-powered industrial package with web-based configuration, commissioning, and flow-logic software built in, plus support for multiple OT and IT protocols.**

NOTE: If you have Ignition from Inductive Automation®, you can use the Cirrus Link MQTT Distributor module to publish directly to Ignition, and use the MQTT Engine module to subscribe to MQTT Sparkplug-B payloads, which Ignition understands.

An efficient publish-subscribe method of communication like MQTT reduces security concerns by eliminating open network ports, and provides a high-performance, two-way communications path for both monitoring and control.

WHAT'S YOUR PROJECT?

These three examples point out some key ways in which an edge I/O product can simplify your IIoT projects.


Do you have a simple idea you'd like to realize without the complexity and cost of a typical IIoT project? Take a look at newer I/O products like *groov* RIO and see if they'll do the job for you. For more information, [contact an Opto 22 engineer](#).

ABOUT OPTO 22

Opto 22 was started in 1974 by a co-inventor of the solid-state relay (SSR), who discovered a way to make SSRs more reliable.

Opto 22 has consistently built products on open standards rather than on proprietary technologies. The company developed the red-white-yellow-black color-coding system for input/output (I/O) modules and the open Optomux® protocol, and pioneered Ethernet-based I/O.

Logging temperature data to a database is simplified with an edge I/O product:

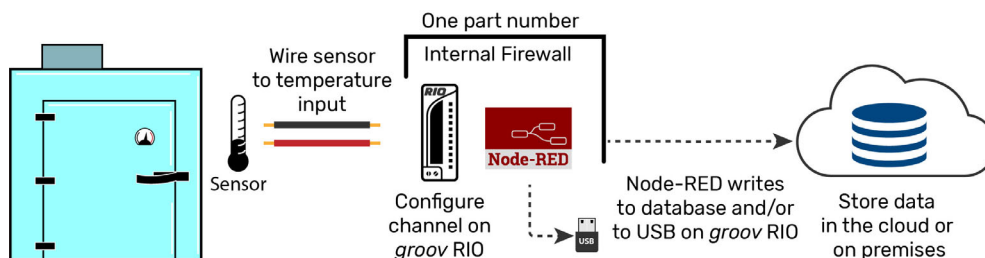

Famous worldwide for its reliable industrial I/O, the company in 2018 introduced *groov EPIC*® (edge programmable industrial controller). EPIC has an open-source Linux® OS and provides connectivity to PLCs, software, and online services, plus data handling and visualization, in addition to real-time control.


The company's latest product line, *groov RIO*®, provides compact, autonomous remote I/O that is ideal for communicating field data in IIoT applications.

All Opto 22 products are manufactured and supported in the U.S.A. Most solid-state SSRs and I/O modules are guaranteed for life.



The company is especially trusted for its continuing policy of providing free product support and free pre-sales engineering assistance.

For more information, visit opto22.com or contact Opto 22 **Pre-Sales Engineering** using the **Contact Us form** on our website.

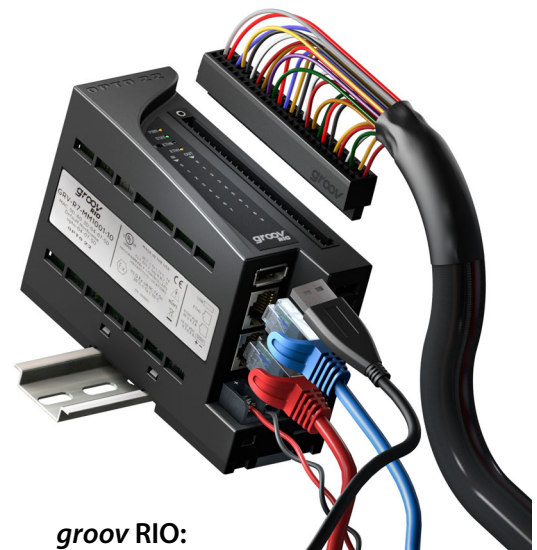

groov RIO:
I/O for the IIoT

